


Product show

Pre-Insulated Terminals

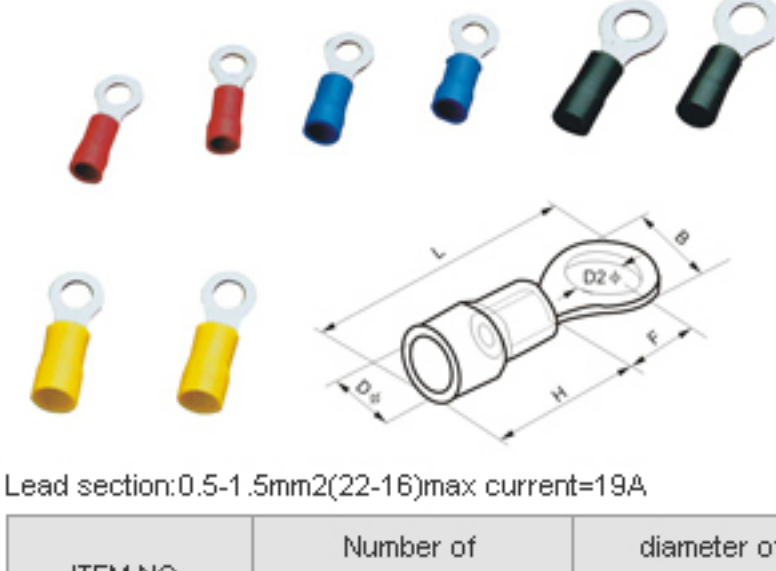

Lead section:0.5-1.5mm2(22-16)max current=19A

ITEM.NO.	Number of ANSI bolt	diameter of bolt mouth d2	B(mm)	L(mm)	F(mm)	H(mm)	Dq(mm)	Color
RV1.25-3	#4	3.2MM	5.7	17.8	4.95	10.0	4.3	Red
RV1.25-3.5	#6	3.7MM	5.7	17.8	4.95			
RV1.25-3.5	#6	3.7MM	6.6	20.1	6.3			
RV1.25-3.5	#6	3.7MM	8.0	21.5	7.0			
RV1.25-4	#8	4.3MM	6.6	20.1	6.3			
RV1.25-4	#8	4.3MM	8.0	21.5	7.0			
RV1.25-5	#10	5.3MM	8.0	21.5	7.0			
RV1.25-6	1/4	6.5MM	11.6	27.5	11.1			
RV1.25-8	5/16	8.4MM	11.6	27.5	11.1	10.0	4.9	Bule
RV1.25-10	3/8	10.5MM	13.6	31.6	13.9			

Lead section:1.5-2.5mm2(16-14)max current=27A


ITEM.NO.	Number of ANSI bolt	diameter of bolt mouth d2	B(mm)	L(mm)	F(mm)	H(mm)	Dq(mm)	Color
RV2-3	#4	3.2mm	6.6	17.8	4.3	10.0	4.9	Bule
RV2-3.5	#6	3.7mm	6.6	17.8	4.3			
RV2-3.5	#6	3.7mm	6.6	21.0	7.0			
RV2-3.5	#6	3.7mm	8.5	22.5	7.75			
RV2-4	#8	4.3mm	6.6	21.0	7.0			
RV2-4	#8	4.3mm	8.5	22.5	7.75			
RV2-5	#10	5.3mm	8.5	22.5	7.75			
RV2-5	#10	5.3mm	9.5	22.5	7.75			
RV2-6	1/4	6.5mm	12.0	27.6	11.0	12.5	6.2	balck
RV2-8	5/16	8.4mm	12.0	27.6	11.0			
RV2-8	3/8	10.5mm	13.6	30.2	13.9			

Lead section:2.5-4mm2(14-12)max current=37A

ITEM.NO.	Number of ANSI bolt	diameter of bolt mouth d2	B(mm)	L(mm)	F(mm)	H(mm)	Dq(mm)	Color
RV3.5-4	#8	4.3mm	8.0	24.5	7.7	12.5	6.2	balck
RV3.5-5	#10	5.3mm	8.0	24.5	7.7			
RV3.5-5	#10	5.3mm	12.0	27.9	7.7			
RV3.5-6	1/4	6.5mm	12.0	27.9	7.7			

Lead section:4-6mm2(12-10)max current=48A

ITEM.NO.	Number of ANSI bolt	diameter of bolt mouth d2	B(mm)	L(mm)	F(mm)	H(mm)	Dq(mm)	Color
RV5.5-3.5	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	yellow
RV5.5-4	#8	4.3mm	7.2	21.5	5.9			
RV5.5-4	#10	4.3mm	9.5	25.5	8.3			
RV5.5-5	#10	5.3mm	9.5	25.5	8.3			
RV5.5-6	1/4	6.5mm	12.0	31.5	13.0			
RV5.5-8	5/16	8.4mm	15.0	33.7	13.7			
RV5.5-10	3/8	10.5mm	15.0	33.7	13.7			
RV5.5-12	1/2	13.2mm	19.2	38.1	16.0			

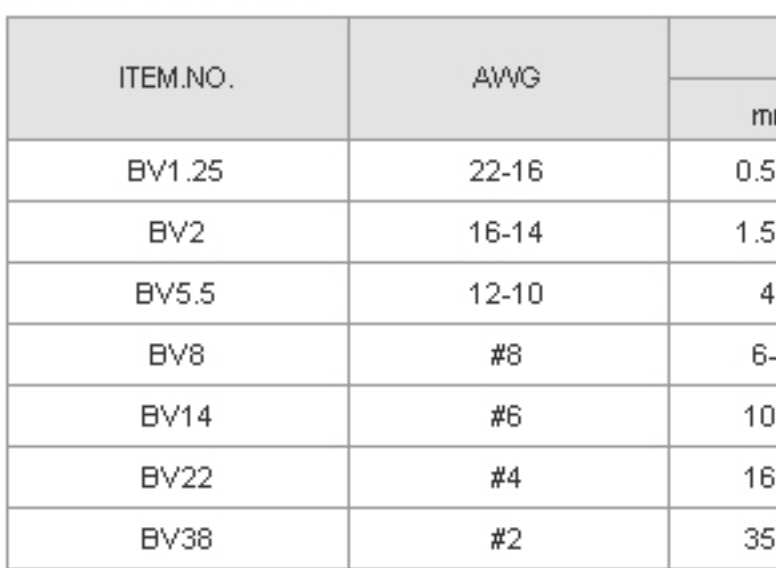

Insulated buttconnectors


ITEM.NO.	AWG	Dimension(mm)				max	color
		mm ²	l	Dq	L		
BV1.25	22-16	0.5-1.5	15.0	1.7	26.0	19A	red
BV2	16-14	1.5-2.5	15.0	2.3	26.0	27A	bule
BV5.5	12-10	4-6	15.0	3.4	26.0	48A	yellow
BV8	#8	6-10	21.0	4.5	32.0	62A	red
BV14	#6	10-16	26.0	5.8	42.0	88A	bule
BV22	#4	16-25	29.0	7.7	50.0	115A	yellow
BV38	#2	35-50	32.0	9.4	55.0	160A	red

Insulated buttconnectors

ITEM.NO.	AWG	Dimension(mm)				max	color
		mm ²	l	Dq	L		
PVT1.25	22-16	0.5-1.5	8.0	1.7	16.0	19A	red
PVT2	16-14	1.5-2.5	8.0	2.3	16.0	27A	bule
PVT5.5	12-10	4-6	8.5	3.4	20.5	48A	yellow

Insulated buttconnectors

ITEM.NO	Dimension			VWire range		
	l	Dq	Dq	Single mm	twin mm ²	A.W.G
B-1.25	16.5	3.3	1.9	0.57-1.44	0.25-1.65	22-16
B-2	16.5	4.0	2.6	1.44-1.82	1.04-2.63	16-14
B-5.5	16.5	5.5	3.7	1.82-2.89	2.63-6.64	12-10
B-8	22.5	7.1	5.1	2.89-3.65	64-10.52	8
B-14	27.5	9.0	6.4	3.65-4.62	1052-16.78	6
B-22	30.5	11.4	8.2	4.62-5.81	16.78-26.66	4
B-38	33.5	13.3	10.1	5.81-7.34	26.66-42.42	2
B-60	36.0	15.4	12.0	7.34-8.26	42.42-60.57	1/0
B-70	37.8	17.4	14.0	8.26-9.27	60.57-76.28	2/0
B-80	39.5	19.4	15.4	9.27-10.41	76.28-96.3	3/0
B-100	39.5	22.0	17.6	10.41-11.68	96.6-117.2	4/0
B-125	43.4	24.1	19.2	10.01-12.7	107.2-130.4	4/0
B-500	55.5	26.0	20.9	11.68-13.8	117-152.05	250-300MCM
B-180	58.5	28.6	22.0	13.8-15.6	152-05-192.6	300-350MCM
B-200	64.5	32.5	25.7	15.6-17.5	192.6-242.2	400MCM
B-250	64.5	32.5	25.7	15.6-17.5	192.6-242.2	400MCM
B-325	73.5	37.0	29.0	17.5-20.3	242.2-325	500-600MCM

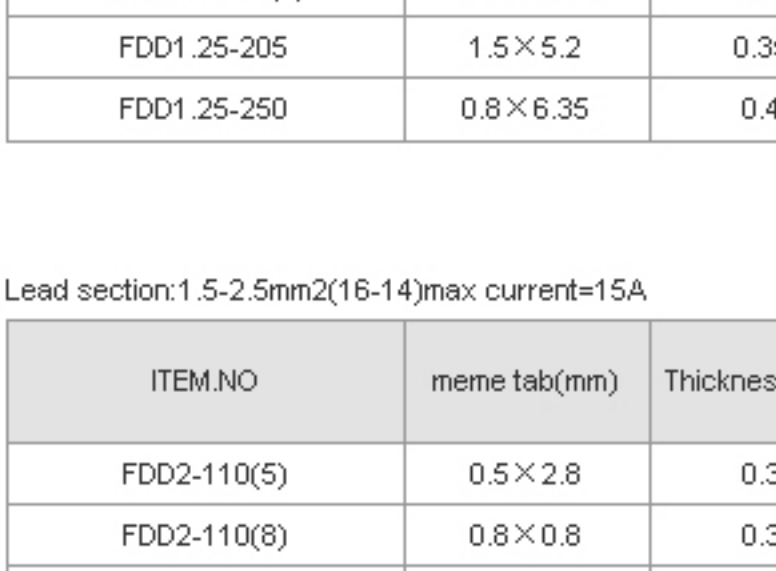

Lead section:0.5-1.5mm2(22-16)max current=10A


ITEM.NO	meme tab(mm)	Thickness(mm)	Dimension				
			B(mm)	dq	Dq	L	H
FDD1.25-110(5)	0.5×2.8	0.3	3.8	1.70	3.80	19.0	10.0
FDD1.25-110(8)	0.8×0.8	0.3	3.8	1.70	3.80	19.0	
FDD1.25-187(5)	0.5×4.75	0.35	5.6	1.70	3.80	19.0	
FDD1.25-187(8)	0.8×4.75	0.35	5.6	1.70	3.80	19.0	
FDD1.25-205	1.5×5.2	0.35	6.5	1.70	3.80	20.0	
FDD1.25-250	0.8×6.35	0.4	7.4	1.70	3.80	21.0	

Lead section:1.5-2.5mm2(16-14)max current=15A

ITEM.NO	meme tab(mm)	Thickness(mm)	Dimension				
			B(mm)	dq	Dq	L	H
FDD2-110(5)	0.5×2.8	0.3	3.8	2.3	4.3	19.0	10.0
FDD2-110(8)	0.8×0.8	0.3	3.8	2.3	4.3	19.0	
FDD2-187(5)	0.5×4.75	0.35	5.6	2.3	4.3	19.0	
FDD2-187(8)	0.8×4.75	0.35	5.6	2.3	4.3	19.0	
FDD2-205	1.5×5.2	0.35	6.5	2.3	4.3	20.0	
FDD2-250	0.8×6.35	0.4	7.4	2.3	4.3	21.0	
FDD2-312	0.8×0.8	0.4	9.0	2.3	4.3	23.0	

Lead section:4-6mm2(12-10)max current=24A

ITEM.NO	meme tab(mm)	Thickness(mm)	Dimension				
			B(mm)	dq	Dq	L	H
FDD5.5-250	0.5×6.35	0.4	7.4	3.4	5.7	25.0	14.0
FDD5.5-375	1.2×9.4	0.5	10.9	3.4	5.7	29.6	

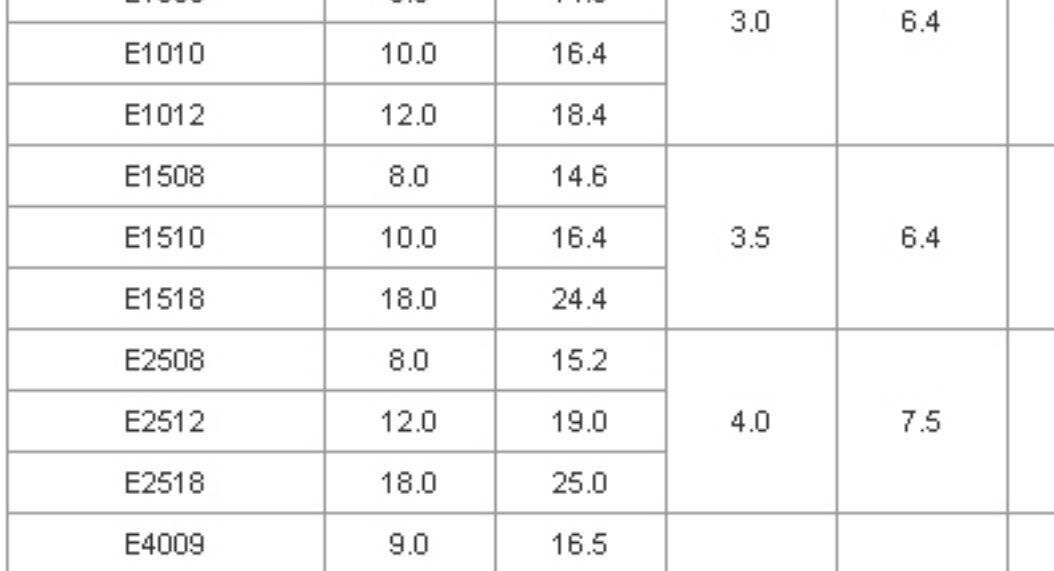

Insulated Cord End Terminals

E6012	12.0	20.0	6.3	8.0	3.9	3.5	#10	6.3	black green
E6018	18.0	26.0							
E10-12	12.0	21.5	7.6	9.5	4.9	4.5	#7	10.0	milky white brown green
E10-18	18.0	27.5							
E16-12	12.0	22.0	8.8	10.2	6.2	5.8	#5	16.0	green milky white
E16-18	18.0	28.2							
E25-16	16.0	29.0	11.2	13.0	7.9	7.5	#4	25.0	brown green black
E25-22	22.0	35.0							
E35-16	16.0	30.0	12.7	14.0	8.7	8.3	#2	35.0	greyish brown
E35-25	25.0	39.0							
E50-20	20.0	36.0	15.3	16.0	10.9	10.3	#1	50.0	olive
E50-25	25.0	41.0							

