


## GHR4 One Module 3KA RCBO



	Standard		IEC/EN 61009
Electrical features	Mode		Electronic type
	Type(wave form of the earth leakage sensed)		A,AC
	Thermo-magnetic release characteristic		B,C
	Rated current I <sub>n</sub>	A	2, 4, 6, 10, 16, 20, 25, 32, 40
	Poles	P	1P+N N-Pole break
	Rated voltage U <sub>e</sub>	V	AC 230
	Rated sensitivity I <sub>Δn</sub>	A	0.03,0.1
	Rated residual making and breaking capacity I <sub>Δm</sub>	A	500
	Rated short-circuit capacity I <sub>cn</sub>	A	3000
	Break time under I <sub>Δn</sub>	s	≤0.1
	Rated frequency	Hz	50/60
	Rated impulsewithstand voltage(1.2/50)U <sub>imp</sub>	V	4000
	Dielectric test voltage at ind.Freq for 1min	kV	2
	Insulation voltage U <sub>i</sub>	V	250
Mechanical features	Pollution degree		2
	Electrical life		4000
	Mechanical life		4000
	Fault current Indicator		Yes
	Protection degree		IP20
	Ambient temperature (with daily average≤35℃)	℃	-5~+40(Special application please refer to temperature compensation correction)
	Storage temperature	℃	-25~+70
Installation	Terminal connection type		Cable/Pin-type busbar/U type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>	16
		AWG	18-5
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25
		AWG	18-3
	Mounting		On DIN rail EN 60715(35mm) by means of fast clip device
	Connection		From top

### Wiring Diagram

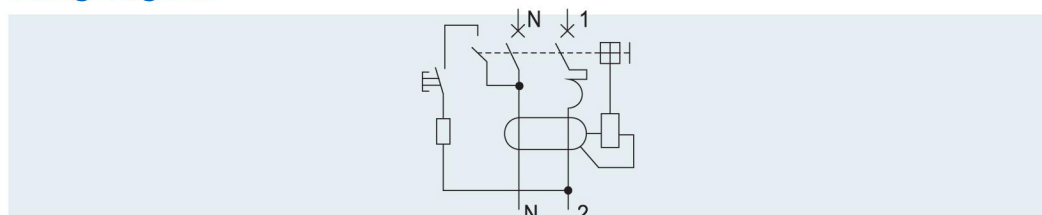

### Overall and mounting dimensions(mm)

