## WKE10 700VDC FUSE





# Specifications

Model Number	Rated voltage (V)	Rated current in (A)	Package
WKE10(WKE10A08)	DC700V	8A	6 pieces/carton
WKE10(WKE10A10)	DC700V	10A	6 pieces/carton
WKE10(WKE10A12)	DC700V	12A	6 pieces/carton
WKE10(WKE10A16)	DC700V	16A	6 pieces/carton
WKE10(WKE10A20)	DC700V	20A	6 pieces/carton
WKE10(WKE10A25)	DC700V	25A	6 pieces/carton
WKE10(WKE10A30)	DC700V	30A	6 pieces/carton
WKE10(WKE10A08)	DC700V	8A	6 pieces/carton

## Fusing features test

Rated current	Appointed current times(ln)	Appointed time(s)	Remark
	1.1 ln	>14400(4H)	Required not fusing
ln	1.5 ln	20-1500	fusing within appointed time
	2.0 ln	1-300	fusing within appointed time
	3.0 ln	0.2S-30	fusing within appointed time
	5.0 ln	0.05-1	fusing within appointed time

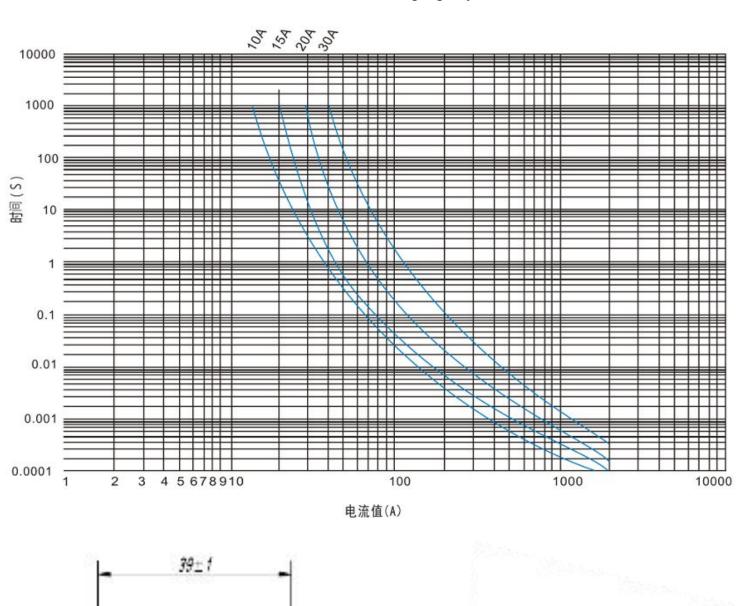

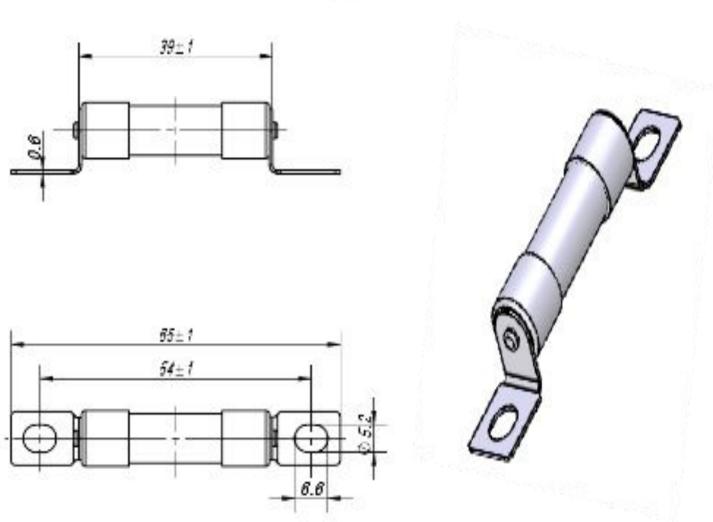

## WKE14 700VDC FUSE





Specifications

Model Number	Rated voltage (V)	Rated current in (A)	Package
WKE14(WKE14A12)	DC700V	12A	6 pieces/carton
WKE14(WKE14A16)	DC700V	16A	6 pieces/carton
WKE14(WKE14A20)	DC700V	20A	6 pieces/carton
WKE14(WKE14A25)	DC700V	25A	6 pieces/carton
WKE14(WKE14A30)	DC700V	30A	6 pieces/carton
WKE14(WKE14A40)	DC700V	40A	6 pieces/carton
WKE14(WKE14A50)	DC700V	50A	6 pieces/carton
WKE14(WKE14A63)	DC700V	63A	6 pieces/carton

## Fusing features test

Rated current	Appointed current times(ln)	Appointed time(s)	Remark
	1.1 ln	>14400(4H)	Required not fusing
ln	1.5 ln	20-1500	fusing within appointed time
	2.0 ln	1-300	fusing within appointed time
	3.0 ln	0.2S-30	fusing within appointed time
	5.0 ln	0.05-1	fusing within appointed time

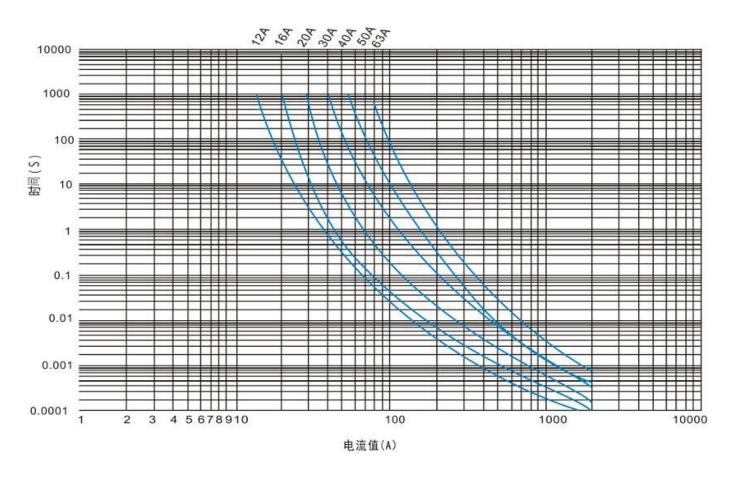

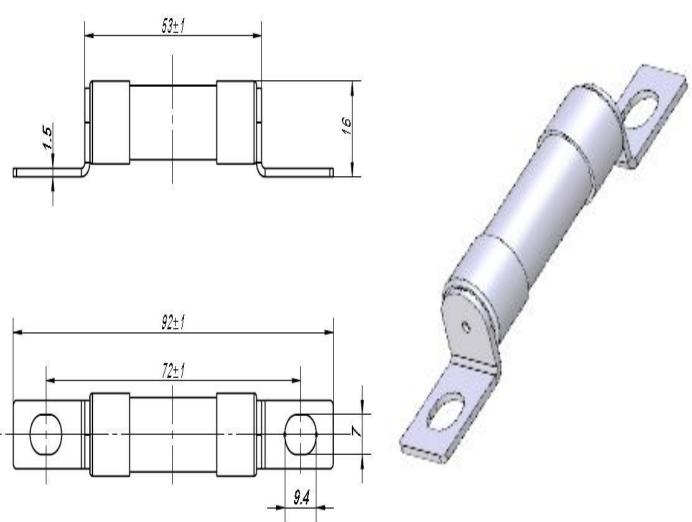

#### WKE30 700VDC FUSE



Specifications

Model Number	Rated voltage (V)	Rated current in (A)	Package
WKE30(WKE30A125)	E30(WKE30A125) DC700V 125A		3 pieces/carton
WKE30(WKE30A150)	DC700V	150A	3 pieces/carton
WKE30(WKE30A175)	DC700V	175A	3 pieces/carton
WKE30(WKE30A200)	DC700V	200A	3 pieces/carton
WKE30(WKE30A225)	DC700V	225A	3 pieces/carton
WKE30(WKE30A250)	DC700V	250A	3 pieces/carton

Туре	Carton box Size (cm)	GM(KG)	NW(KG)	Quantity/Box
SWKE-150A	46*24*29	16	14	3Pcs

#### Fusing features test

Rated current	Appointed current times(ln)	Appointed time(s)	Remark
	1.1 ln	>14400(4H)	Required not fusing
ln	1.5 ln	20-1500	fusing within appointed time
	2.0 ln	1-300	fusing within appointed time
	3.0 ln	0.2S-30	fusing within appointed time
	5.0 ln	0.05-1	fusing within appointed time

